


PRODUCT CODE:-

ESP-YC

CATEGORY:-


PV CABLE CONNECTORS

**BASIC DIMENSIONS:-**

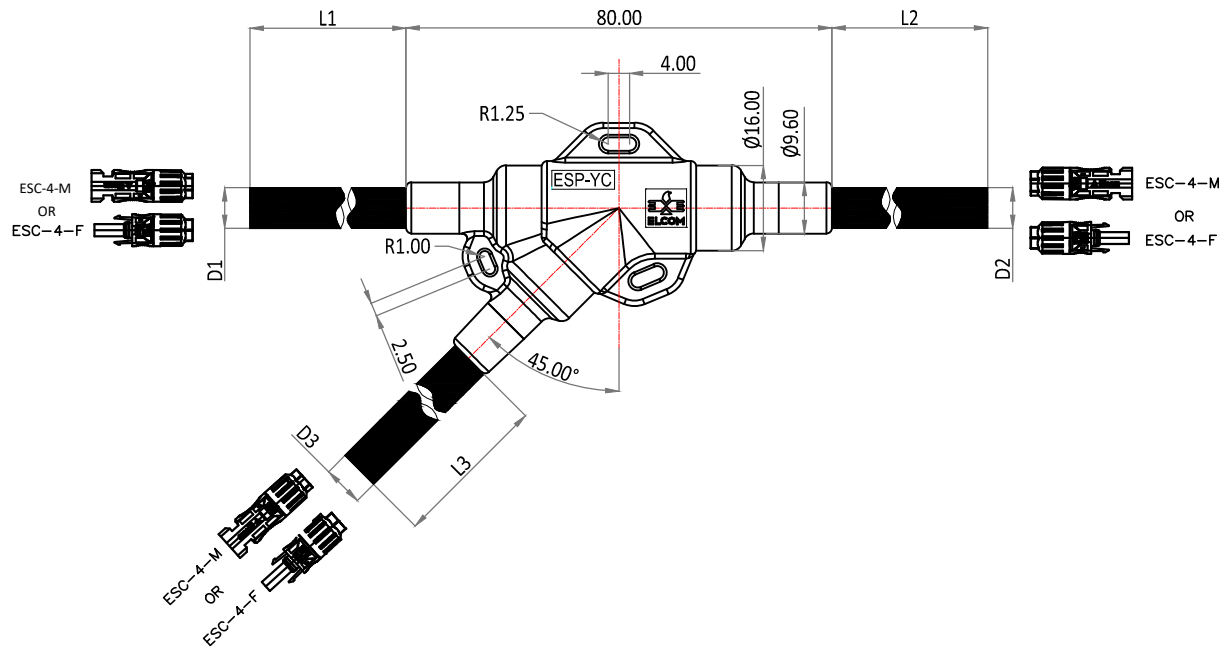

**SPECIFICATION TABLE:-**

SR.NO	PARAMETER	SPECIFICATION
1	Type	Y Connector Over moulded
2	Rated current	20A-30A.
3	Rated voltage	1500V DC
4	Test voltage	8000V AC(1min)
5	Degree of protection (Mated)	IP67(IEC 60529)
6	Protection class	II
7	Flammability class	UL 94, V-0
8	Insulation material	PPO
9	Temperature range	-40°C To +85°C
10	Cable cross sections(D1,D2,D3)	2.5/4/6 sq.mm.(As per customer requirement)
11	L1,L2,L3	As per customer requirement
12	Reference Standard	IEC-62852:2014

						APP	11.09.18	GJG	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com</p>
						CHK	11.09.18	DPP	
						DRN	11.09.18	RKG	
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER	
OVER	-	1	10	mm	Max.	NTS.	1 OF 1	P E S C 2 1 1 8	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.			REVISION		
±	0.2	0.3	0.5				0		

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved