

# LMLL Series LED Machine Light



Technical Data Sheet  
Version 4, Date: 07/08/2022



Craftech LED Machine Lights are compact, robust and efficient. It provides bright and uniform light distribution improving productivity and safety in operations. It is suitable for light as well as heavy industrial applications. It is constructed with heavy duty extruded aluminium and tempered glass with frosted surface finish to minimize glare on eyes. With estimated working life of 50,000 hrs., that will provide 5 years of maintenance free operation.

## Specification


Light Diffuser	PMMA for Diffused, PC for Clear
Housing Material	Heavy Duty Extruded Anodized Aluminium Housing 6063 Grade
Mounting Arrangement	"L" Clamp, rotatable mounting to change light focus angle
LED Type	LM 80 Approved, 2835 Package LED, 0.2 watt/LED & 0.5 watt/LED
LED Light Angle, Color, CRI	120 Deg, 6500K, >80
Luminaire Light Yield	110-120 Lumens / Watt
Insulation Resistance at 500 VDC	1.3 x 10 <sup>4</sup> Mega-Ohm
Operating Temperature	-20°C to +65°C
Operating Life	50,000 Hrs.
Standard Conformity, Degree of Protection	IEC 60947, IEC 60529, IEC 60068, IP67

*Image only for representative purpose*

*The LED light is available in standard version and can be customized to size and wattage as per customer for specific application requirement.*

## Accessories:

Adapter 230 VAC to 24 VDC

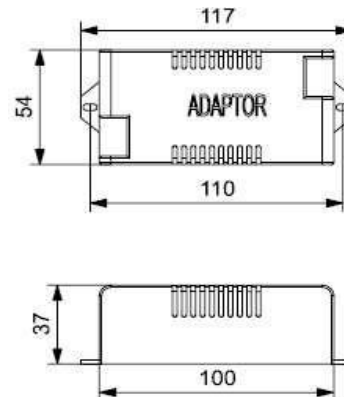

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad,  
Nashik-422010, INDIA


Email: [info@craftech.co.in](mailto:info@craftech.co.in)  
[www.craftech.co.in](http://www.craftech.co.in)



# LMLL Series LED Machine Light



Technical Data Sheet  
Version 4, Date: 07/08/2022

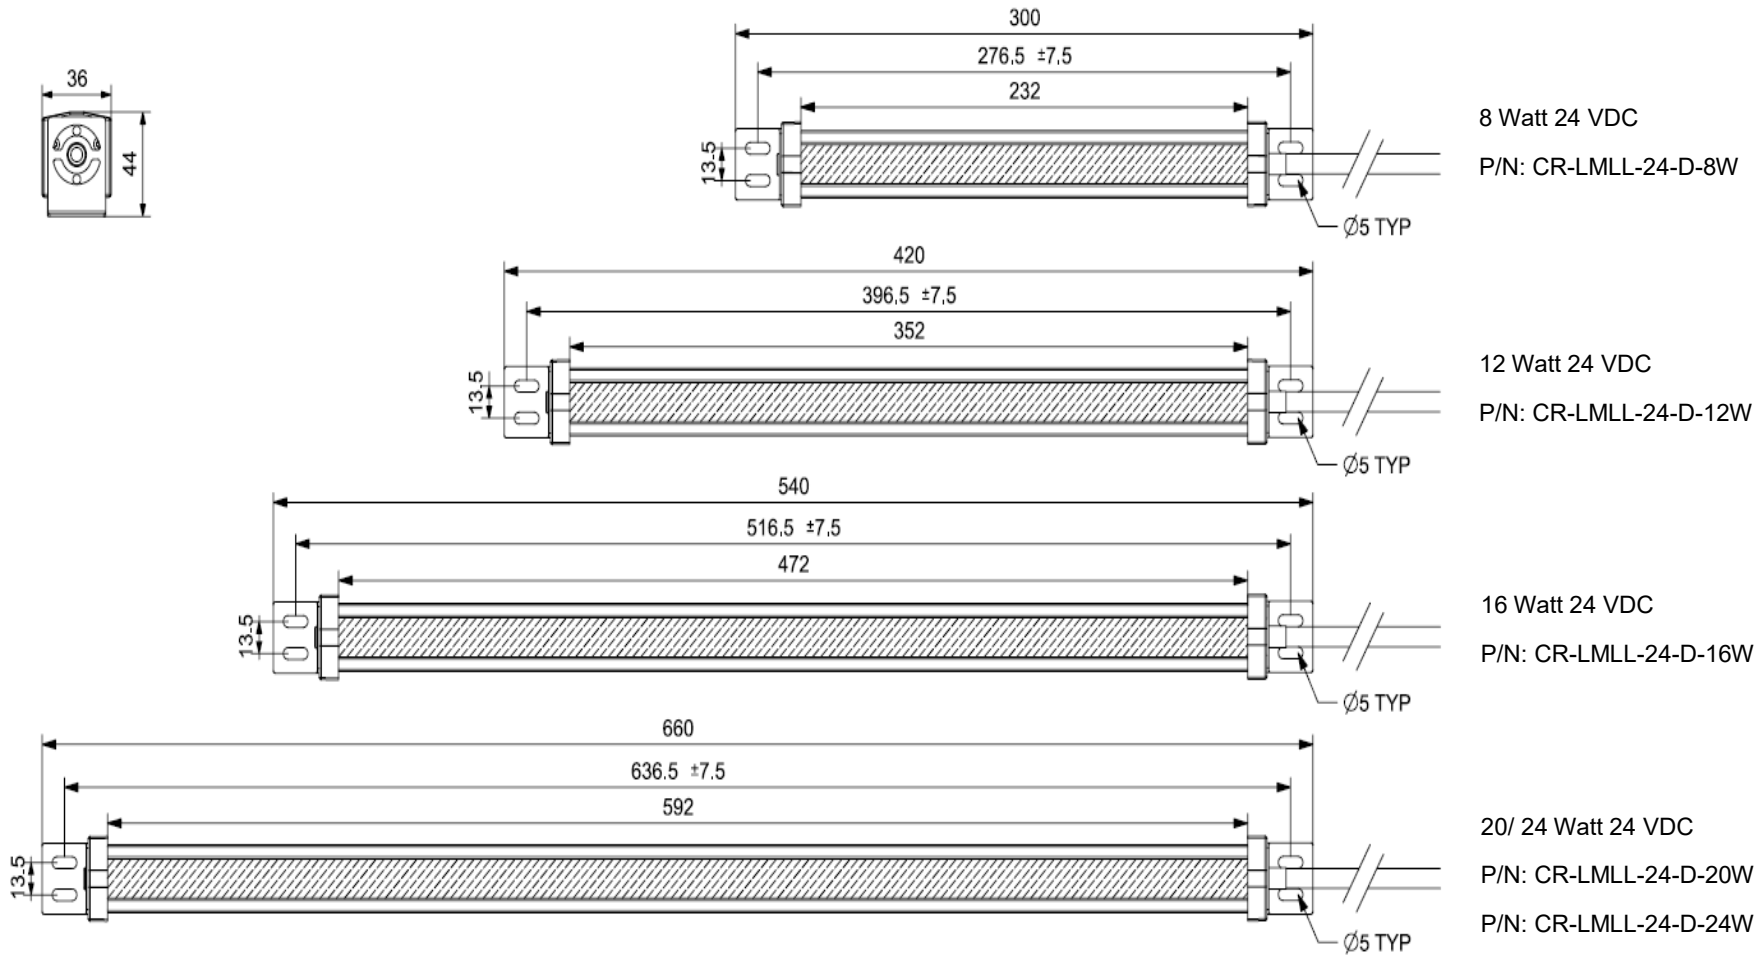

Information in the datasheet is subject to modification without prior notice

Craftech, 264, I floor, Mulay I Square,  
Opp. Siemens, MIDC, Ambad,  
Nashik-422010, INDIA

Email: [info@craftech.co.in](mailto:info@craftech.co.in)  
[www.craftech.co.in](http://www.craftech.co.in)

