


PRODUCT CODE:- ESC-BC-S3P1,ESC-BC-S1P3

CATEGORY:- PV CABLE CONNECTORS

BASIC DIMENSIONS:-

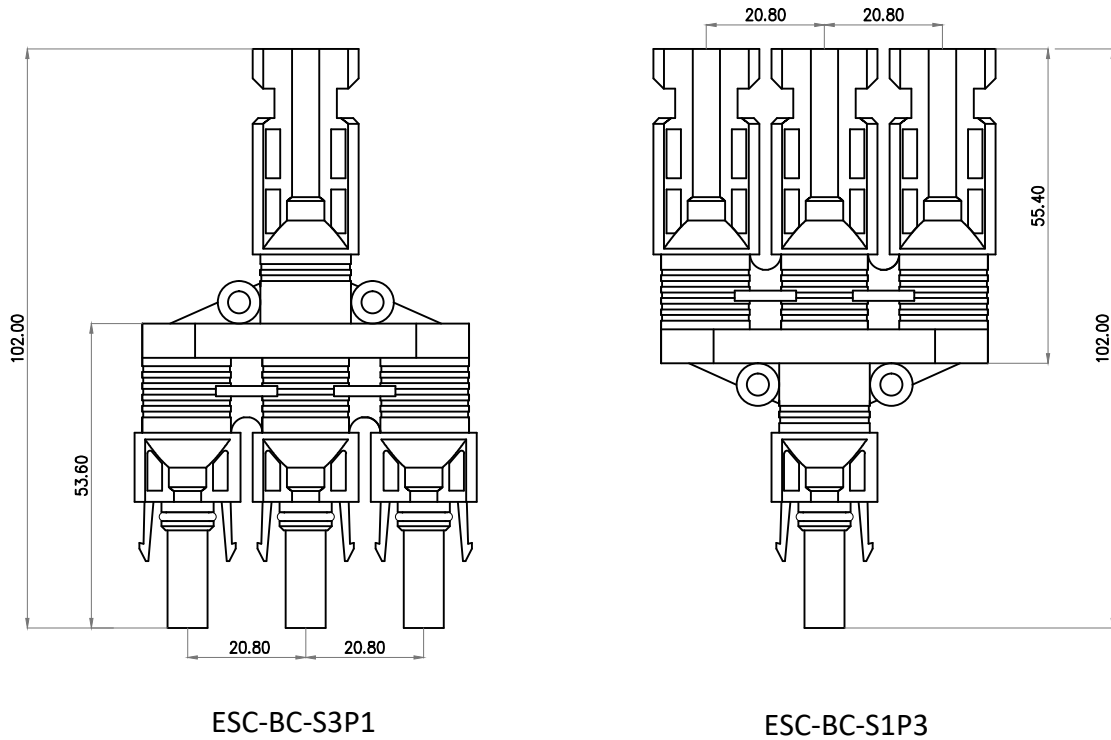


ESC-BC-S3P1

ESC-BC-S1P3

SPECIFICATION TABLE:-

SR.NO	PARAMETER	SPECIFICATION
1	Type	Ø4mm 1 to 3 adapter connector
2	Rated current	30A
3	Rated voltage	1500V DC
4	Test voltage	8000V AC(1min)
5	Typical contact Resistance	≤0.5mOhms
6	Degree of protection (Mated)	IP68(IEC 60529)
7	Protection class	II
8	Flammability class	UL 94, V-0
9	Insulation material	PP0
10	Contact material	Copper Alloy,Tin plating
11	Sealing Material	Silicon Rubber
12	Temperature range	-40°C To +85°C
13	Pin dimensions	Ø4.0mm
14	Reference Standard	IEC 62852:2014

						APP	30.08.14	GJG	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com</p>
						CHK			
						DRN	30.08.14	<i>Sagar</i>	
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER	REVISION
OVER	-	1	10	mm	Max.	NTS.	1 OF 1	P E S C 2 1 1 3	0
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.					
±	0.2	0.3	0.5						

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved